

R-410A

DC HYBRID INVERTER

AIR PURIFICATION



### AvAnt 7SKV Inverter high-wall

#### Features

AvAnt-garde Inverter model specifically conceived for residential users.

If your need is ideal temperature all year round, delivered with high energy saving and extremely low noise, Toshiba AvAnt Inverter is the solution.

A class in cooling and heating


3 in 1 filtration system

Extremely low sound level

Modern and compact design



\* model 137SKV, from 2.5 m distance

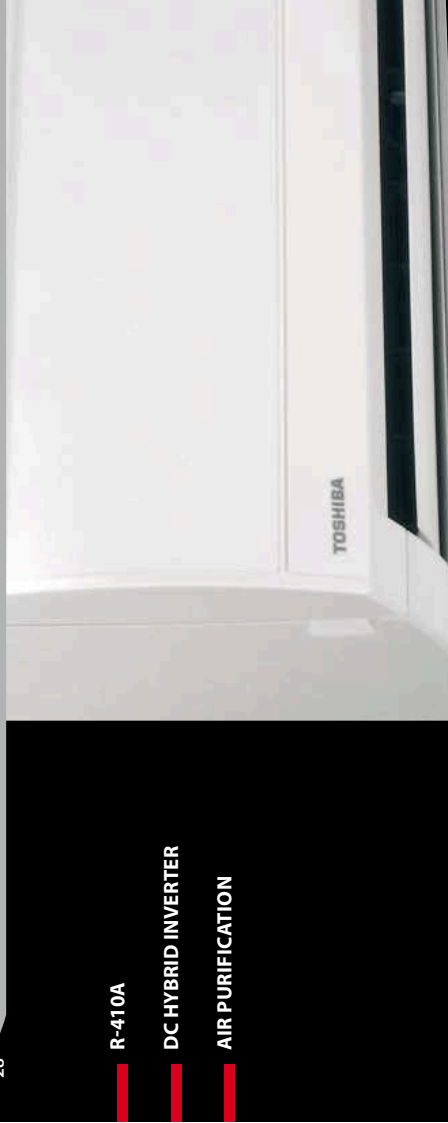

### Technical specifications heat pump

	RAS-1075SAVE3	RAS-1375SAVE3	RAS-1675SAVE3	RAS-1075SAVE3	RAS-1375SAVE3	RAS-1675SAVE3
Outdoor unit						
Indoor unit						
Cooling capacity	2.5	3.5	4.4			
Cooling range (min. - max.)	1.1 - 3.0	1.1 - 4.0	1.1 - 5.0			
Power input (min. - rated - max.)	0.26 - 0.76 - 0.97	0.25 - 1.08 - 1.33	0.26 - 1.56 - 1.90			
EER	3.29	3.24	2.82			
Energy efficiency class	A	A	C			
Annual energy consumption	380	540	780			
Heating capacity	3.2	4.2	5.2			
Heating range (min. - max.)	0.9 - 4.1	0.9 - 5.0	1.0 - 6.2			
Power input (min. - rated - max.)	0.20 - 0.87 - 1.20	0.17 - 1.14 - 1.48	0.19 - 1.52 - 1.81			
COP	3.68	3.68	3.42			
Energy efficiency class	A	A	B			
Indoor unit						
Air flow (max)	522 - 145	570 - 158	690 - 192			
Sound pressure level (l/m/h)	29/33/38	26/33/39	30/40/45			
Sound power level (h)	51	52	58			
Air flow	576 - 160	624 - 173	744 - 207			
Sound pressure level (l/m/h)	30/35/40	28/34/40	31/40/45			
Sound power level (h)	53	53	58			
Dimensions (h x w x d)	250 x 740 x 195	275 x 790 x 205	275 x 790 x 205			
Weight	8	9	9			
Outdoor unit						
Air flow	1620 - 450	2250 - 625	2250 - 625			
Sound pressure level	48	48	49			
Sound power level	61	61	62			
Operating range	15 ± 43	-10 ± 46	-10 ± 46			
Sound pressure level	50	50	50			
Sound power level	63	63	63			
Operating range	-10 ± 24	-15 ± 24	-15 ± 24			
Dimensions (h x w x d)	530 x 660 x 240	550 x 780 x 290	550 x 780 x 290			
Weight	27	33	40			
Compressor type	DC Rotary	DC Rotary	DC Twin Rotary			
Flare connections (gas - liquid)	3/8" - 1/4"	3/8" - 1/4"	1/2" - 1/4"			
Minimum pipe length	2	2	2			
Maximum pipe length	10	20	20			
Maximum height difference	8	10	10			
Chargeless pipe length	10	15	15			
Power supply	220/240-1-50	220/24-1-50	220/240-1-50			

C = cooling mode  
H = heating mode